
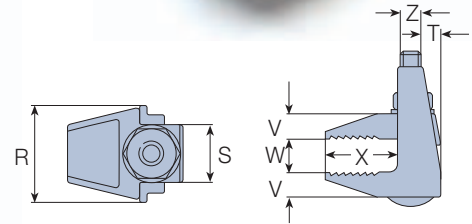
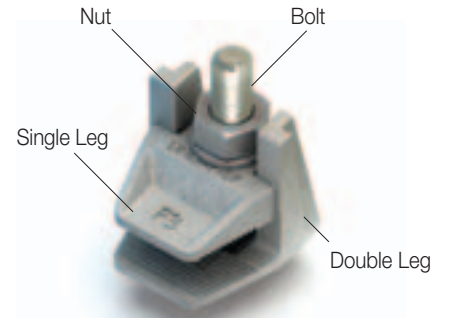


Type F3

Malleable iron, hot dip galvanised

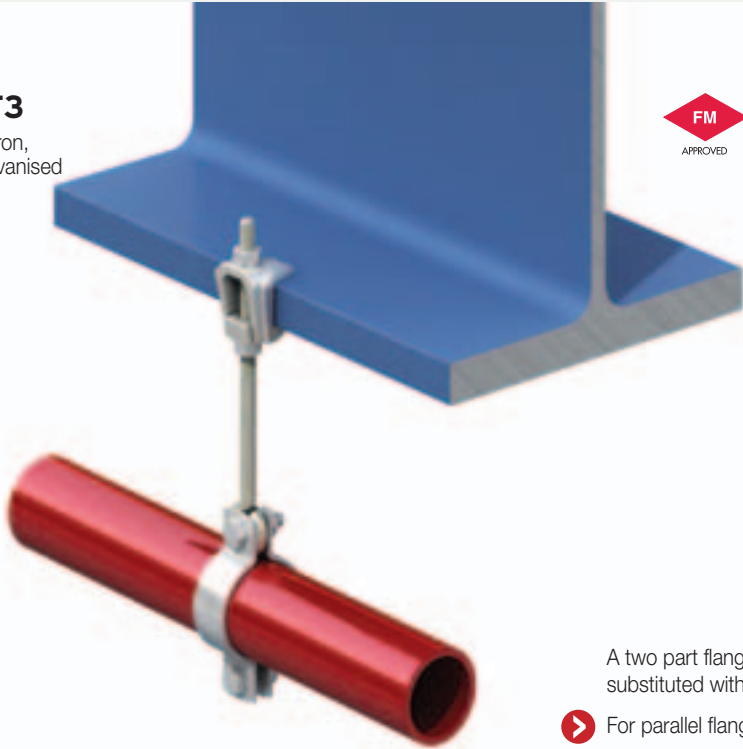

A two part flange clamp with large clamping range. The bolt can be substituted with either drop rod or J bolts.


➤ For parallel flanges only.

Product Code		Bolt 4.6 Z	Safe Working Load (4:1 Factor of Safety) Tensile kN	Clamping Thickness W mm	Torque Nm	Dimensions				
with Bolt	without Bolt					S mm	T mm	V mm	X mm	Width R mm
F308NC	F308NB	M8	0.9	0 - 25	6	19	6	8	20	33
F310NC	F310NB	M10	1.2	0 - 30	20	22	7	10	25	38
F312NC	F312NB	M12	2.0	0 - 40	39	29	9	12	35	49
F316NC	F316NB	M16	4.0	0 - 55	93	36	12	16	46	60
F320NC	F320NB	M20	6.0	0 - 70	177	44	15	19	55	76

■ Order example: F308NC

Type F3-BICC

Malleable iron, hot dip galvanised

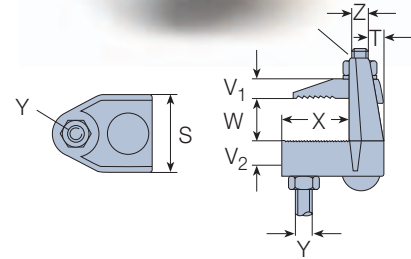

A two part flange clamp which fixes claw type cable cleats directly beneath the flange.

Supplied with grade 4.6 bolt.

Product Code	Bolt 4.6 Z	Safe Working Load (4:1 Factor of Safety) Tensile kN	Clamping Thickness W mm	Thread Y	Torque Nm	Dimensions				
						T mm	V ₁ mm	V ₂ mm	X mm	Width S mm
F310BICCA	M10	1.2	0 - 30	M10	20	6.5	10	16	30	40

■ Order example: F310BICCA